SHEET 3-1
SCALE 1:200

Existing sign to be relocated (F4.1)

Cut back existing random rubble wall

Existing sign to be relocated (F4.1)

Protected signal controlled junctions

GAS GOVENOR

SUB STATION

RESIDENTIAL PROPERTIES

WIRE MESH FENCE

Sheet 2-2 Sheet 3-1

Sheet 3-1 Sheet 4-1

HARD SURFACING KEY:

P1 - CARRIAGEWAY:
Hot Rolled Asphalt with 20mm coated chips
Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup

P1.5 - CARRIAGEWAY (CYCLESTREET):
Hot Rolled Asphalt with 20mm coated red chips
Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup

P2.1 - NATURAL STONE SETTS: TRAFFIC ISLAND INFILL
150 x 300 x 100mm reclaimed granite setts (grey mix)

P2.2 - BLOCK PAVING : RAISED TABLE
100 x 200 x 80mm concrete block paving, herringbone bond with soldier course. Colour: charcoal

P2.3 - BLOCK PAVING : ROUNDABOUT OVERRUN
100 x 200 x 80mm concrete block paving, radial stretcher bond with soldier course

P2.4 - BLOCK PAVING : ROUNDABOUT ISLAND
100 x 200 x 80mm concrete block paving, stretcher bond. Colour: black / white blocks as shown)

P2.5 - BLOCK PAVING : CYCLEWAY SEGREGATION
100 x 200 x 80mm concrete block paving, stretcher bond. Colour: charcoal

P2.6 - BLOCK PAVING : PERMEABLE (SHARED USE)
100 x 200 x 80mm concrete block paving, herringbone bond with soldier course. Colour: charcoal / light grey (as shown)

P3 - CYCLEWAY:
Hot Rolled Asphalt with 20mm red chips
Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup

P4 - FOOTWAY:
Asphalt Concrete footway
Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup

P4.3 - FOOTWAY:
PCC Slabs to match existing

P5.1 - TACTILE PAVING: RED BLISTER
400 x 400 x 50mm PCC

P5.2 - TACTILE PAVING: BUFF BLISTER
400 x 400 x 50mm PCC

P5.3 - TACTILE PAVING: BUFF TRAMLINE / LADDER
400 x 400 x 50mm PCC

P5.4 - TACTILE PAVING: BUFF CORDUROY
400 x 400 x 50mm PCC

WALLS / FENCES KEY:

W1.1 - BOUNDARY FENCE
Timber post + 4 rail fence

W1.2 - BOUNDARY FENCE
1.8m high galvanized steel mesh fence with concrete posts

W2.1 - BOUNDARY WALL
1.5m high random rubble freestanding wall

W2.2 - RETAINING WALL
Up to 1.2m random ruble retaining wall

W2.3 - BOUNDARY WALL
1.5m high random rubble semi-freestanding wall

STREET FURNITURE KEY:

F1.1 - BENCH: STANDARD
ACC Standard

F1.3 LITTER BIN
ACC standard

F1.4 - CYCLESTAND
Stainless Steel Sheffield Stands

F2.1 - BOLLARD (VEHICLE)
Non-illuminated Neopolitan Bollard with red / white retroreflective patches. 200mmØ x 925mm high

F2.2 - BOLLARD (KEEP LEFT / RIGHT)
Non-illuminated Weebol Bollard with Diag 610 sign in RS50 NAL Sockets.

F3.1 - BUS SHELTER
Commutaports Cairngorm shelters with green roof and solar panels

F4.1 - NHS TOTEM SIGN
Existing NHS Forresterhill Health Campus sign relocated

SOFT LANDSCAPING KEY:

S1.2 - TREES: EXISTING RETAINED
Refer to Landscaping Plan for details

S1.3 - TREES: NEW
Refer to Landscaping Plan for details

S1.3 - TREES: REMOVED
Refer to Landscaping Plan for details


S2.1 - SHRUB AND PERENNIAL PLANTING
Refer to Landscaping Plan for details

S3.1 - AMENITY GRASS SEEDING
Refer to Landscaping Plan for details

S4.1 - WILDFLOWER SEEDING
Refer to Landscaping Plan for details

S5.1 - TREE PIT INFILL
'Hoggin' or similar self binding surfacing. 10mm to dust, mix of clay, sand and gravel content

S5.2 - PITCHED PEBBLE EDGE TO PLANTING BEDS
80-120mm rounded Scottish Beach Pebbles set in concrete to planting beds set back 500mm from carriageway as maintenance strip

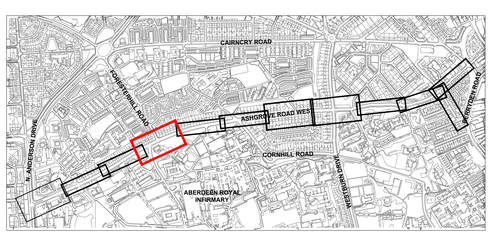

INDEX SHEET
SCALE 1:10,000

Ashgrove Connects