
SHEET 6-1
SCALE 1:200

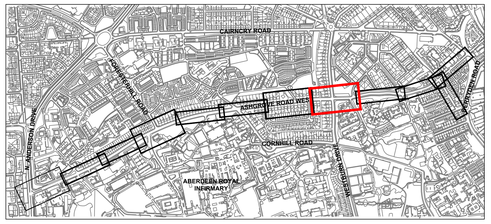

INDEX SHEET
SCALE 1:10,000

HARD SURFACING KEY:

- **P1 - CARRIAGEWAY:** Hot Rolled Asphalt with 20mm coated chips. Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup
- **P1.5 - CARRIAGEWAY (CYCLESTREET):** Hot Rolled Asphalt with 20mm coated red chips. Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup
- **P2.1 - NATURAL STONE SETTS: TRAFFIC ISLAND INFILL** 150 x 300 x 100mm reclaimed granite setts (grey mix)
- **P2.2 - BLOCK PAVING : RAISED TABLE** 100 x 200 x 80mm concrete block paving, herringbone bond with soldier course. Colour: charcoal
- **P2.3 - BLOCK PAVING : ROUNDABOUT OVERRUN** 100 x 200 x 80mm concrete block paving, radial stretcher bond with soldier course
- **P2.4 - BLOCK PAVING : ROUNDABOUT ISLAND** 100 x 200 x 80mm concrete block paving, stretcher bond. Colour: black / white blocks as shown)
- **P2.5 - BLOCK PAVING : CYCLEWAY SEGREGATION** 100 x 200 x 80mm concrete block paving, stretcher bond. Colour: charcoal
- **P2.6 - BLOCK PAVING : PERMEABLE (SHARED USE)** 100 x 200 x 80mm concrete block paving, herringbone bond with soldier course. Colour: charcoal / light grey (as shown)
- **P3 - CYCLEWAY:** Hot Rolled Asphalt with 20mm red chips. Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup
- **P4 - FOOTWAY:** Asphalt Concrete footway. Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup
- **P4.3 - FOOTWAY:** PCC Slabs to match existing
- **P5.1 - TACTILE PAVING: RED BLISTER** 400 x 400 x 50mm PCC
- **P5.2 - TACTILE PAVING: BUFF BLISTER** 400 x 400 x 50mm PCC
- **P5.3 - TACTILE PAVING: BUFF TRAMLINE / LADDER** 400 x 400 x 50mm PCC
- **P5.4 - TACTILE PAVING: BUFF CORDUROY** 400 x 400 x 50mm PCC

WALLS / FENCES KEY:

- **W1.1 - BOUNDARY FENCE** Timber post + 4 rail fence
- **W1.2 - BOUNDARY FENCE** 1.8m high galvanized steel mesh fence with concrete posts
- **W2.1 - BOUNDARY WALL** 1.5m high random rubble freestanding wall
- **W2.2 - RETAINING WALL** Up to 1.2m random ruble retaining wall
- **W2.3 - BOUNDARY WALL** 1.5m high random rubble semi-freestanding wall

STREET FURNITURE KEY:

- **F1.1 - BENCH: STANDARD** ACC Standard
- **F1.3 LITTER BIN** ACC standard
- **F1.4 - CYCLESTAND** Stainless Steel Sheffield Stands
- **F2.1 - BOLLARD (VEHICLE)** Non-illuminated Neopolitan Bollard with red / white retroreflective patches. 200mmØ x 925mm high
- **F2.2 - BOLLARD (KEEP LEFT / RIGHT)** Non-illuminated Weebol Bollard with Diag 610 sign in RS50 NAL Sockets.
- **F3.1 - BUS SHELTER** Commutaports Cairngorm shelters with green roof and solar panels
- **F4.1 - NHS TOTEM SIGN** Existing NHS Forresterhill Health Campus sign relocated

SOFT LANDSCAPING KEY:

- **S1.2 - TREES: EXISTING RETAINED** Refer to Landscaping Plan for details
- **S1.3 - TREES: NEW** Refer to Landscaping Plan for details
- **S1.3 - TREES: REMOVED** Refer to Landscaping Plan for details
- **S2.1 - SHRUB AND PERENNIAL PLANTING** Refer to Landscaping Plan for details
- **S3.1 - AMENITY GRASS SEEDING** Refer to Landscaping Plan for details
- **S4.1 - WILDFLOWER SEEDING** Refer to Landscaping Plan for details
- **S5.1 - TREE PIT INFILL** 'Hoggin' or similar self binding surfacing. 10mm to dust, mix of clay, sand and gravel content
- **S5.2 - PITCHED PEBBLE EDGE TO PLANTING BEDS** 80-120mm rounded Scottish Beach Pebbles set in concrete to planting beds set back 500mm from carriageway as maintenance strip

Shared use access to driveways

Shared use access to driveways

Protected compact roundabout with overrun area

BUS STOP

Road West

Grove Crescent L

Ashgrove Roa

Carnie Driv

Elmwood Hospital

Sheet 5-1

Sheet 6-1

Sheet 7-1

Sheet 6-1*

Ashgrove Connects