

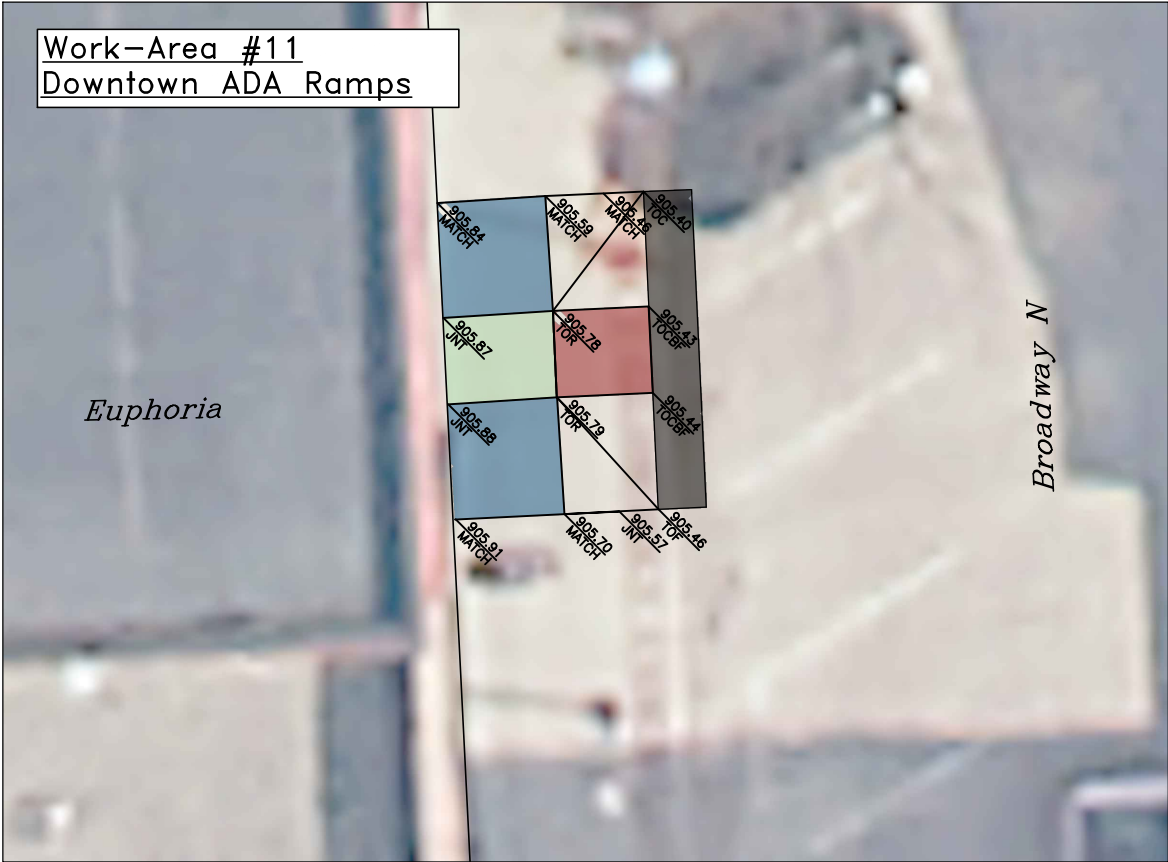
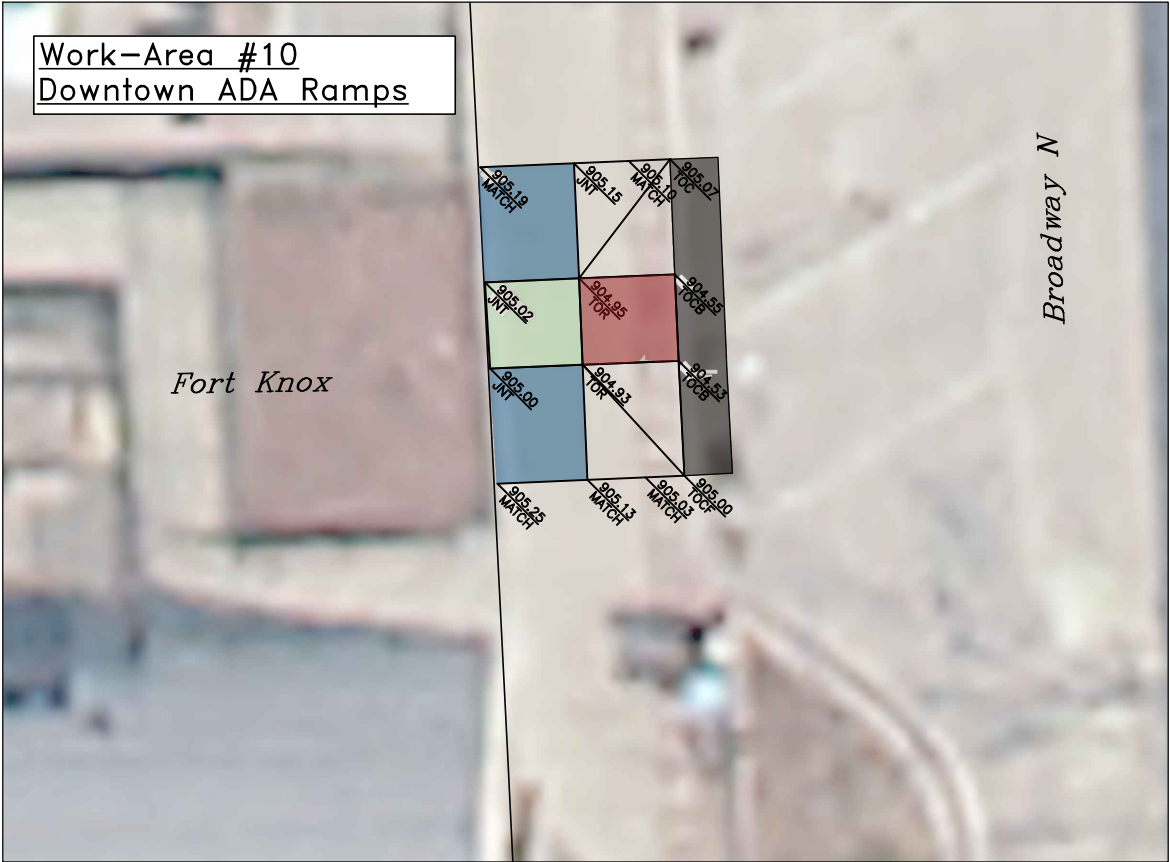


03/09/26 09:03:10AM T:\Engineering\Projects\Current\SR-26-B1\Plans&Specs\SR-26-B1_BP.dwg

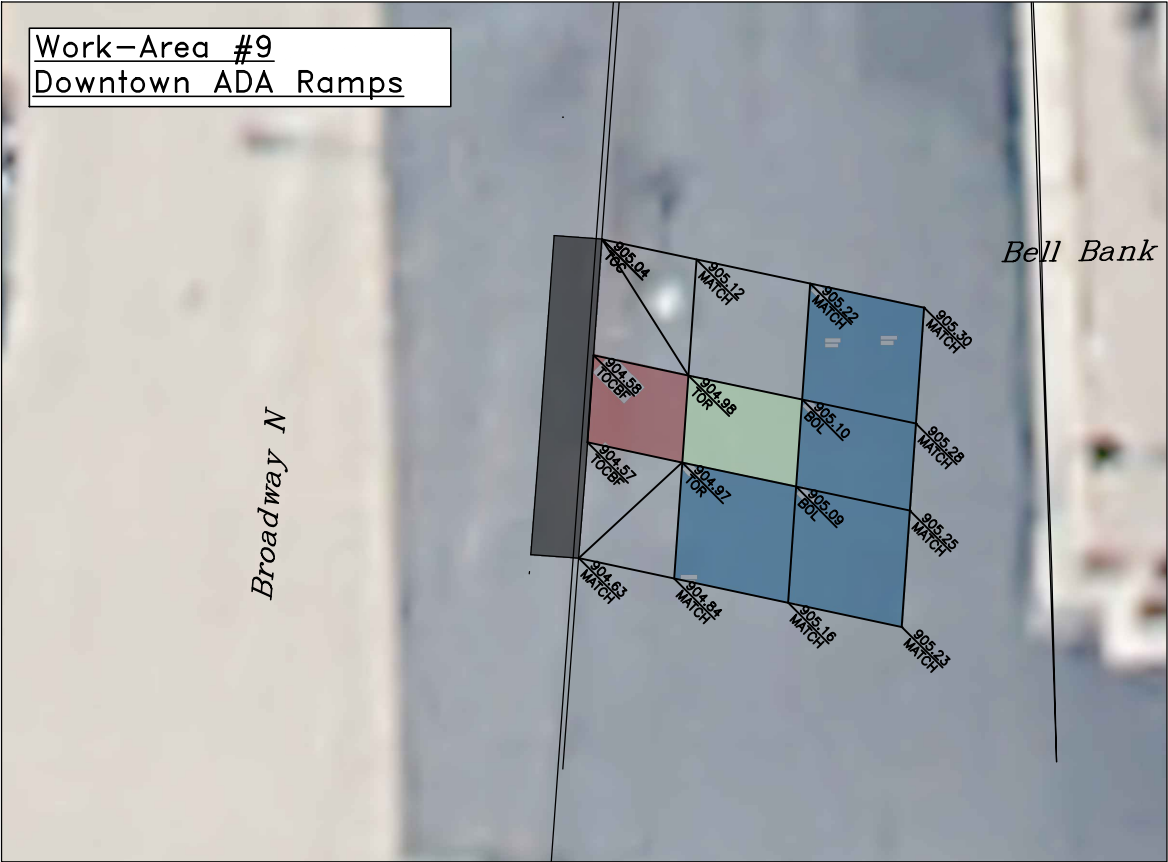

NOTES:

1. APPROX. 48 SY F&I SIDEWALK 4" THICK REINF CONC.
2. APPROX. 18 SY F&I SIDEWALK 6" THICK REINF CONC.
3. 50 LF REM & REPL CURB & GUTTER
4. SAW JOINTS TO MATCH EXISTING JOINT LAYOUT

LEGEND:

- RAMP**
2% MAX CROSS SLOPE
8% MAX RUNNING SLOPE
- LANDING**
2% MAX CROSS SLOPE
2% MAX RUNNING SLOPE
- CLEAR_ZONE**
2% MAX CROSS SLOPE
5% MAX RUNNING SLOPE
- 10:1 MAX CURB TRANSITION**
- TRANSITION AREA**

ALL ELEVATIONS ARE BASED ON
NAVD 88 DATUM (PRE-GEOD18).
(UNLESS NOTED OTHERWISE)

ADDENDUM & CONSTRUCTION REVISIONS		
③	②	①
SEAL		
Paving - Downtwon ADA Ramps		
Sidewalk & Shared Use Path Rehab/Reconstruction		
Project # SR-26-B1		
DESIGN BY: BGB	CHECKED BY: MCJ	
DRAWN BY: BGB	ORIG DATE: FEB 2026	
	SECTION NO.	SHEET NO.
	060	9