SHEET 7-1
SCALE 1:200

SHEET 7-2
SCALE 1:200

Elder Place

grove Road

Sheet 7-2
Sheet 7-1

Sheet 7-1
Sheet 7-2

Sheet 8-1
Sheet 7-2

Sheet 8-1
Sheet 8-2

RESIDENTIAL PROPERTIES

SIGN

SPEED BUMP

FOOTPATH

SWITCH BOX

BUILDING

BIN

WH49.90

WH47.41

WH48.25

WH49.39

WH51.18

WH54.12

51.86

HARD SURFACING KEY:

- **P1 - CARRIAGEWAY:** Hot Rolled Asphalt with 20mm coated chips. Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup
- **P1.5 - CARRIAGEWAY (CYCLESTREET):** Hot Rolled Asphalt with 20mm coated red chips. Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup
- **P2.1 - NATURAL STONE SETTS: TRAFFIC ISLAND INFILL** 150 x 300 x 100mm reclaimed granite setts (grey mix)
- **P2.2 - BLOCK PAVING : RAISED TABLE / SHARED USE** 100 x 200 x 80mm concrete block paving, herringbone bond with soldier course. Colour: charcoal / light grey (as shown)
- **P2.3 - BLOCK PAVING : ROUNDABOUT OVERRUN** 100 x 200 x 80mm concrete block paving, radial stretcher bond with soldier course
- **P2.4 - BLOCK PAVING : ROUNDABOUT ISLAND** 100 x 200 x 80mm concrete block paving, stretcher bond
- **P2.5 - BLOCK PAVING : CYCLEWAY SEGREGATION** 100 x 200 x 80mm concrete block paving, stretcher bond. Colour: charcoal
- **P3 - CYCLEWAY:** Hot Rolled Asphalt with 20mm red chips. Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup
- **P4 - FOOTWAY:** Asphalt Concrete footway. Refer to 40217-IFL-XX-DR-C-50-010 to 018 for Construction Makeup
- **P4.3 - FOOTWAY:** PCC Slabs to match existing
- **P5.1 - TACTILE PAVING: RED BLISTER** 400 x 400 x 50mm PCC
- **P5.2 - TACTILE PAVING: BUFF BLISTER** 400 x 400 x 50mm PCC
- **P5.3 - TACTILE PAVING: BUFF TRAMLINE / LADDER** 400 x 400 x 50mm PCC
- **P5.4 - TACTILE PAVING: BUFF CORDUROY** 400 x 400 x 50mm PCC

WALLS / FENCES KEY:


- **W1.1 - BOUNDARY FENCE** Timber post + 4 rail fence
- **W1.2 - BOUNDARY FENCE** 1.8m high galvanized steel mesh fence with concrete posts
- **W2.1 - BOUNDARY WALL** 1.5m high random rubble freestanding wall
- **W2.2 - RETAINING WALL** Up to 1.2m random ruble retaining wall
- **W2.3 - BOUNDARY WALL** 1.5m high random rubble semi-freestanding wall

STREET FURNITURE KEY:

- **F1.1 - BENCH: STANDARD** ACC Standard
- **F1.3 LITTER BIN** ACC standard
- **F1.4 - CYCLESTAND** Stainless Steel Sheffield Stands
- **F2.1 - BOLLARD (VEHICLE)** Non-illuminated Neopolitan Bollard with red / white retroreflective patches. 200mmØ x 925mm high
- **F2.2 - BOLLARD (KEEP LEFT / RIGHT)** Non-illuminated Weebol Bollard with Diag 610 sign in RS50 NAL Sockets.
- **F3.1 - BUS SHELTER** Commutaports Cairngorm shelters with green roof and solar panels
- **F4.1 - NHS TOTEM SIGN** Existing NHS Foresterhill Health Campus sign relocated

SOFT LANDSCAPING KEY:

- **S1.2 - TREES: EXISTING RETAINED** Refer to Landscaping Plan for details
- **S1.3 - TREES: NEW** Refer to Landscaping Plan for details
- **S1.3 - TREES: REMOVED** Refer to Landscaping Plan for details
- **S2.1 - SHRUB AND PERENNIAL PLANTING** Refer to Landscaping Plan for details
- **S3.1 - AMENITY GRASS SEEDING** Refer to Landscaping Plan for details
- **S4.1 - WILDFLOWER SEEDING** Refer to Landscaping Plan for details
- **S5.1 - TREE PIT INFILL** 'Hoggin' or similar self binding surfacing. 10mm to dust, mix of clay, sand and gravel content
- **S5.2 - PITCHED PEBBLE EDGE TO PLANTING BEDS** 80-120mm rounded Scottish Beach Pebbles set in concrete to planting beds set back 500mm from carriageway as maintenance strip

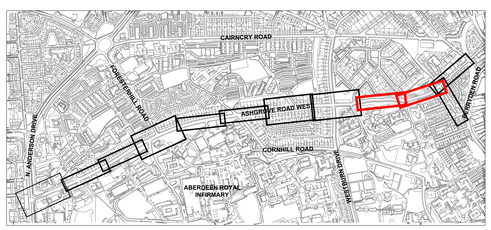

INDEX SHEET
SCALE 1:10,000

Ashgrove Connects