Millimetres 100 10 0

DO NOT SCALE

N

APPROXIMATE LOCATION OF EXISTING TREE TO BE REMOVED

2 No. Viburnum × bodnantense 'charles lamont'

EXTENT OF EXISTING SCRUB VEGETATION SHOWN INDICATIVELY - TO BE CLEARED AND CUT BACK TO EXTENT SHOWN

AMENITY GRASS SEED MIX 12 M2

WOODLAND UNDERSTOREY SEED MIX WITH NATIVE BULBS 61.96M2

1 No. Viburnum × bodnantense 'charles lamont'

WOODLAND UNDERSTOREY SEED MIX WITH NATIVE BULBS 73.23 M2

EVERGREEN GROUNDCOVER MIX
17 No. Ajuga reptans
14 No. Pulmonaria longifolia
14 No. Viola odorata

16 No. Ruscus aculeatus

6 No. Salvia pratensis

6 No. Luzula sylvatica


15 No. Bistorta officinalis

8 No. Luzula sylvatica

WOODLAND UNDERSTOREY SEED MIX WITH NATIVE BULBS 36.21 M2

3 No. Viburnum × bodnantense 'charles lamont'

EXTENT OF EXISTING SCRUB VEGETATION SHOWN INDICATIVELY - TO BE CLEARED AND CUT BACK TO EXTENT SHOWN

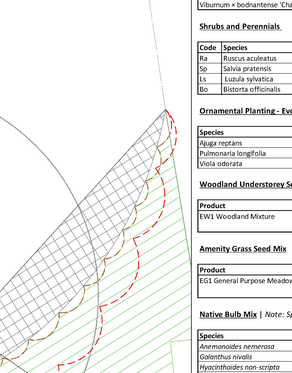

© Crown copyright [and database rights] 2023 OS AC0000813791
You are permitted to use this data solely to enable you to respond to, or interact with, the organisation that provided you with the data. You are not permitted to copy, sub-license, distribute or sell any of this data to third parties in any form

Scale 1:500
10m 0m 10m 20m 30m

Tongham Pocket Park| Plant Schedule

Proposed Specimen Shrub | *Note: Refer to plan drawings for locations*

Species	Common Name	Height (cm)	Container Size (ltres)	Form	Quantity	Notes
Viburnum × bodnantense 'Charles Lamont'	Viburnum	125-150	Rootball	Branched; 6 breaks	6	Refer to Planting Plan for locations

Shrubs and Perennials

Code	Species	Common Name	Height (cm)	Container Size (ltres)	Density (per m2)	Quantity	Notes
Ra	Ruscus aculeatus	butcher's broom	40-60	3	3	16	
Sp	Salvia pratensis	meadow clary	40-60	3	3	6	Refer to Planting Plan for locations
Ls	Luzula sylvatica	Shrubby Veronica 'Caledonia'	30-40	3	4	14	
Bo	Bistorta officinalis	common bistort	30-40	2	5	15	

Ornamental Planting - Evergreen Groundcover Mix | *Note: Planted with equal area percentage per species (25% each), arranged randomly*

Species	Common Name	Height (cm)	Container Size (ltres)	Density (per m2)	Quantity	Notes
Ajuga reptans	Bronze Bugle	20-30	2	6	17	Plant in groups of 5-7
Pulmonaria longifolia	narrow-leaved lungwort	15-20	2	5	14	Plant in groups of 5-7
Viola odorata	Sweet Violet	20-30	2	5	14	Plant in groups of 5-7

Woodland Understorey Seed Mix

Product	Supplier	Sowing Rate (grams per m2)	Total Area (m2)	Total (grams)	Notes
EW1 Woodland Mixture	Emorsgate Seeds	4	171.4	686	For seeding area refer to Planting Plan

Amenity Grass Seed Mix

Product	Supplier	Sowing Rate (grams per m2)	Total Area (m2)	Total (grams)	Notes
EG1 General Purpose Meadow Grass	Emorsgate Seeds	4	12	48	For seeding area refer to Planting Plan

Native Bulb Mix | *Note: Spread/mixed evenly throughout Woodland Understorey Seed Mix areas*

Species	Common Name	Form	Number (per m2)	% of mix	Quantity
Anemonoides nemerosa	Wood anemone	Bulb	20	25	3428
Galanthus nivalis	Native Snowdrop	Bulb	20	25	3428
Hyacinthoides non-scripta	Native Bluebell	Bulb	20	25	3428
Narcissus pseudonarcissus lobularis	Wild daffodil	Bulb	20	25	3428

KEY

- HIGHWAYS BOUNDARY
- EXISTING TREE RETAINED
- PROPOSED ORNAMENTAL FEATURE SHRUB
- EXISTING VEGETATION RETAINED AND MANAGED
- WOODLAND WILDFLOWER SEED MIX WITH NATIVE BULBS
- ORNAMENTAL PLANTING EVERGREEN GROUNDCOVER MIX
- NATIVE ORNAMENTAL PLANTING SHRUB AND PERENNIAL MIX
- RESEEDED AMENITY GRASS

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following significant residual risks (Reference shall also be made to the design hazard log).

Construction
WORKING NEAR TREES ROOT PROTECTION AREA. REFER TO HEALTH AND SAFETY RISK REGISTER DOCUMENT NO: WT360005-ATRL-HGN-PTPK-RA-CH-000001

Maintenance / Cleaning
LANDSCAPE MAINTENANCE STRATEGY
REFER TO: WT360005-ATRL-ELS-PTPK-RP-LS-000001

Use
NONE

Decommissioning / Demolition
NONE

NOTES:

1. DO NOT SCALE FROM THIS DRAWING.
2. ALL DIMENSIONS ARE IN METRE UNLESS OTHERWISE STATED.
3. HEALTH AND SAFETY:
   - THE CONTRACTOR SHALL BE AWARE OF ALL STATUTORY
   - UNDERTAKING PLAN THAT MAY BE LOCATED WITHIN THE SITE.
4. PROPOSED CURVED SEATING BY WOODSCAPE OR SIMILAR APPROVAL. DETAILS AND FIXING METHOD ARE INDICATIVE, TO BE FINALISED BY THE SUPPLIER.
5. BENCHES, BINS, AND PLANTING ARE SUBJECT TO APPROVAL BY THE MAINTAINER.
6. FOR FOOTWAYS AND KERB - REFER TO HIGHWAY ENGINEERING DRAWINGS AND SPECIFICATIONS.
7. FOR HARD LANDSCAPE DETAILS REFER TO HARD LANDSCAPE PLAN WT360005-ATRL-ELS-PTPK-DR-LS-000001
8. FOR SOFT AND HARD LANDSCAPE DETAILS REFER TO SOFT AND HARD LANDSCAPE DETAIL WT360005-ATRL-ELS-PTPK-DR-LS-000003

Description	Status	Revision	Drawn	Checked	Reviewed	Authorised	Issue Date
For Review/Comment	S3	P01	GM	AS	AS	---	25/10/24
For Construction Issue	A1	C01	GM	AS	AA	AA	11/07/25
Updated Client Comments	A1	C02	GM	AS	AS	VK	26/09/25

Status: A1 — Drawing Suitability: AUTHORISED & ACCEPTED

AtkinsRéalis
Woodcote Grove
Ashley Road
Epsom
Surrey
KT18 5BW
Tel: +44 (0)1372 726140
Fax: +44 (0)1372 740055
www.atkinsrealis.com
© AtkinsRéalis (2025)

Client: SURREY COUNTY COUNCIL — Surrey Highways & Transport for Surrey

Project Title: WT360005 Tongham Detailed Design

Drawing Title: POCKET PARK PLANTING PLAN

Drawing Number: Project WT360005 - Originator ATRL - Volume ELS - Location PTPK - Type DR - Role LS - Number 000002

Original Size:	Scale:	Project Ref. No:	Sheet:	Rev:
A1	1:50	522711	2 of 3	C02

File: C:\PROJECTWISE\ATKINS_HIGHWAYS_UK\DMS74965\WT360005-ATRL-ELS-PTPK-DR-LS-000002.DWG . Plotted: 26/09/2025 14:19:55 By: KAMA4237