massDOT Massachusetts Department of Transportation

Complete Streets Funding Program
Project Prioritization Plan

Municipality	Southbridge
MassDOT District	3
Name	William G. Paille, PE
Title	Transportation Engineer
Date	8/29/2025

Public Engagement
Public Engagement Description
Projects were initally presented to Town Council on May 5, 2025 where the public was allowed to provide comment. The final list of projects were again presented to the Town Council for discussion comment by members and the general public on June 5, 2025.

Project Basics / Location

Project Priority Ranking	Project Name	Project Description	Project Source	Project Location	Google Maps Link
1	North Street Neighborhood ADA & Safety Upgrades	Construction of new ADA compliant pedestrian curb ramps, reset existing and install new granite curb, replace damaged sidewalk with new ADA compliant sidewalks, signage and pavement markings along several streets including North Street from Foster Street to Mechanic Street; Windsor Court; Benefit Street; Dean Street; Lens Street; Lens Court; Wardwell Court; and Crystal Street from North Street to the Main Street roundabout.	Capital Improvement Program (CIP)	North Street from intersection with Foster Street to Mechanic Street; Windsor Court; Benefit Street; Dean Street; Lens Street, Lens Court, Wardwell Court; and Crystal Street from intersection with North Street to the Main Street Roundabout	https://www.google.com/maps/@42.076094,-72.0283154,306m/data=!3m1!1e3?entry=ttu&g_ep=EgoyMDI1MDkwMy4wIKXMDSoASAFQAw%3D%3D
2	Roundabout @ Main Street and Mechanic Street	Square off Roundabout entrances to slow down vehicles, add crosswalks at all approaches and exits, add 5' concrete sidewalk along the whole outer edge of the roundabout, remove and reset granite curb, add truck apron, decrease lane size, add ADA pedestrian curb ramps at new crossings, replace existing concrete sidewalk with new 5' wide concrete sidewalk, mill and overlay existing pavement, add separated bike crossings and a cycle track along the sidewalk, replace existing signage and add new signage.	Safety/Pedestrian/Bicycle Audit	Main Street and Mechanic Street	https://www.google.com/maps/place/42%C2%B004'24.3%22N+72%C2%B001'34.6%22W/@42.0734123,-72.0288416,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0734083!4d-72.0262667?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D
3	Intersections at Charlton Street School – Charlton @ Evergreen and Charlton @ Guelphwood	Construction of new ADA compliant pedestrian curb ramps across Evergreen Street, Guelphwood Road, and the north section of Charlton; Improve intersection geometry at both intersections to reduce crossing distances and speeds; construct pedestrian refuge islands at Evergreen intersection; install new separated bike lanes; reset existing and install new granite curb; install RRFB's at all crosswalks.	Safety/Pedestrian/Bicycle Audit	Charlton Street School – Charlton @ Evergreen and Charlton @ Guelphwood	https://www.google.com/maps/place/42%C2%B004'51.4%22N+72%C2%B001'25.6%22W/@42.0809484,-72.0263527,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0809444!4d-72.0237778?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D
4	Southbridge Town Common ADA Upgrades	Install ADA compliant pedestrian curb ramps, widen concrete sidewalks, reset granite curbing, and repaint crosswalks at multiple locations along Crystal Street from Main Street to North Street; North Street from Crystal Street to Mechanic Street; and Mechanic Street from North Street to Main Street (i.e. Town Common). Install new RRFB's at two locations along Mechanic Street. Modify the geometry at the intersection of North and Mechanic Street, North and Crystal Street.	Safety/Pedestrian/Bicycle Audit	Mechanic Street and Crystal Street between the Roundabout and North Street, Benefit Street, Lens Street, Dean Street, Benefit Street, Windsor Court, North Street between Mechanic and Foster Street	https://www.google.com/maps/place/Southbridge+Town+Common/@42.0747744,-72.0274125,259m/data=!3m1!1e3!4m6!3m5!1s0x89e6a194d1c36833:0xfbf39becfaa908dd!8m2!3d42.074539!4d-72.0267641!16s%2Fg%2F11f4w9cvzj?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D
5	Mechanic Street from North Street to Charlton Street	Install new ADA compliant curb ramps at Violet Avenue and Brochu Street intersections; modify geometry at intersection with Charlton Street to reduce pavement and align ramps and crosswalks; install new curb extensions; install new ADA compliant curb ramps; consolidate traffic signals; upgrade with new countdown timers and APS pushbuttons.	Safety/Pedestrian/Bicycle Audit	Mechanic Street between North Street and Charlton Street	https://www.google.com/maps/place/42%C2%B004'41.6%22N+72%C2%B001'37.8%22W/@42.0782207,-72.0297499,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0782167!4d-72.027175?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D
6	Sidewalk and Pedestrian Curb Ramp Improvements – Torrey Road @ Town Dump Road	Replace asphalt sidewalk with concrete sidewalk, install ADA compliant curb ramps, repaint crosswalk, install new RRFB, install new granite curb.	Safety/Pedestrian/Bicycle Audit	Torrey Road @ Town Dump Road	https://www.google.com/maps/place/42%C2%B005'06.3%22N+72%C2%B000'32.8%22W/@42.0850818,-72.0116943,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0850778!4d-72.0091194?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D
7	Hamilton Sidewalk Upgrades from Crane Street to Hill Street	Reset existing and install new granite curb at various locations along both sides of Hamilton Street; install new ADA compliant curb ramps at the intersections with Marcy Street, Pine Street, in front of St John Paul II Church, in front of Trinity Catholic Academy; construction of a new ADA compliant pedestrian curb ramps and crosswalk across Hamilton Street at Hill Street; reconstruction of existing driveways along the south side of Hamilton between Hill and Oliver Street; reset existing and install new granite curb along both sides of Hamilton Street; install new ADA compliant curb ramps at intersection of Oliver St @ Hill St, Oliver St @ Union St, Union Street @ Cross St, Union St @ Main St, Pine St @ Edwards St, Chester St @ Pine St, Pine St @ Main St, Main St @ Chester St, Main St @ Cross St.; reconstruction of Union St concrete sidewalk along the north side of Union; install new granite curb; driveway reconstruction on Oliver between Hamilton and Hill St.	Safety/Pedestrian/Bicycle Audit	Hamilton Street between Crane Street and Hill Street	https://www.google.com/maps/place/42%C2%B004'54.6%22N+72%C2%B002'21.2%22W/@42.0818429,-72.0417999,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0818389!4d-72.039225?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D
8	Marcy Street Sidewalk and Driveway Improvements between Edwards Street to Hamilton Street	Reconstruction and widening of the concrete sidewalk and driveways	Safety/Pedestrian/Bicycle Audit	Marcy Street between Edwards Street and Hamilton Street	https://www.google.com/maps/place/42%C2%B004'46.6%22N+72%C2%B002'11.7%22W/@42.0796234,-72.0391499,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0796194!4d-72.036575?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D
9	South Street Corridor Sidewalk Upgrades between West St and Main Street, Including Pedestrian Curb Ramp Upgrades @ Oakes Ave, Sayles St, High St, Winter St, Water St, Newell Ave	Reset existing and install new granite curb, replace existing sidewalk along the north side of South Street from the intersection with West Street to Main Street; install new ADA compliant curb ramps at the intersection of Newell Avenue, Water Street, Winter Street, High Street, Sayles Street, and Orchard Street; install new ADA compliant curb ramps, crosswalk, signing and RRFB at intersection with Oakes Avenue; install new ADA compliant ramps, pedestrian crosswalk and RRFB at UMass Memorial Health Harrington Hospital driveway; reconstruct deficient driveways, widen sidewalk between Winter and Water St.; and reset existing and install new granite curb and reconstruct 200 linear feet of sidewalk and driveways along Newell Ave from South Street beginning at the intersection with South Street.	Safety/Pedestrian/Bicycle Audit	South Street between West Street and Main Street	https://www.google.com/maps/place/42%C2%B004'34.8%22N+72%C2%B002'48.4%22W/@42.0763318,-72.0493638,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0763278!4d-72.0467889?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D
10	South Street Improvements West of West St and Bellevue Ave Sidewalk to Off St and Pedestrian Curb Ramp Improvements	Replace existing sidewalk with new 5' wide concrete sidewalk along South Street between West St and Knollwood Dr, replace existing driveways with ADA compliant drives, install new ADA curb ramps at Knollwood Dr, Crestview Dr, Westwood Pkwy and Marjorie Ln, reset existing and install new granite curb; Modify existing geometry at the intersection of Marjorie Ln and Westwood Pkwy; install new ADA compliant curb ramps and replace non-compliant walks at the intersection of Blanchard Dr and Bellevue Ave.	Safety/Pedestrian/Bicycle Audit	South Street between West Street and Off Street, Bellvue Ave, Knollwood Drive	https://www.google.com/maps/place/42%C2%B004'39.6%22N+72%C2%B003'12.3%22W/@42.0776762,-72.0559832,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0776722!4d-72.0534083?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D

Modes Served / Project Types

Project Priority Ranking	Modes Served				Project Types: Intersection Redesign				Street Reconfigurations & Traffic			Pedestrian Crossing Modifications							Pedestrian & Bike Network Connections					Transit Investments		Environment & Streetscape Investments					
	Pedestrian	Bicycle	Transit	Vehicle/Freight	Roundabouts/Mini Traffic Circle	Intersection Reconstruction	Tighten Curb Radii/Curb Extension	Intersection Signalization	Road Diet/Lane Elimination	Lane Narrowing	Other Traffic Calming Elements	ADA-compliant Curb Ramps	Pedestrian Hybrid Beacon/HAWK	Ped-Activated Warning Device/RRFBs	Pedestrian Signal Upgrades	Crossing Islands	Raised Intersection or Raised Crosswalk	Crosswalk Improvements	Sidewalk	Shared-Use Path/Separated Bike Lane	On-road Bike Lane	Bicycle Boulevards	At-grade Rail Crossing Improvements	Transit Station/Stop Access Improvements	Transit Service Improvements	Street Lighting	Wayfinding for Pedestrians/Bicyclists	Bicycle Parking	Bicycle-Friendly Drain Grates	Stormwater Management	Street Trees/Landscaping
1	Yes	No	No	No	No	Yes	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes	No	Yes	Yes	No
2	Yes	Yes	No	Yes	Yes	Yes	Yes	No	No	Yes	Yes	Yes	No	No	No	Yes	No	Yes	Yes	No	Yes	No	No	No	No	No	Yes	No	Yes	Yes	No
3	Yes	Yes	No	Yes	No	Yes	Yes	No	No	No	Yes	Yes	No	Yes	No	Yes	No	Yes	Yes	No	Yes	No	No	No	No	No	Yes	Yes	Yes	No	No
4	Yes	No	No	Yes	No	Yes	Yes	No	No	Yes	Yes	Yes	No	Yes	No	No	No	Yes	Yes	No	Yes	No	No	No	No	No	Yes	Yes	Yes	Yes	Yes
5	Yes	No	No	Yes	No	Yes	Yes	Yes	No	No	Yes	Yes	No	No	Yes	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No
6	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	Yes	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No
7	Yes	Yes	No	No	No	No	No	No	No	Yes	Yes	Yes	No	No	No	Yes	No	Yes	Yes	No	Yes	No	No	No	No	No	No	No	No	No	No
8	Yes	No	No	No	No	No	Yes	No	No	No	No	Yes	No	No	No	No	No	No	Yes	No	No	No	No	No	No	No	No	No	No	No	No
9	Yes	No	No	No	No	No	Yes	No	No	No	No	Yes	No	Yes	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No
10	Yes	No	No	Yes	No	Yes	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No

Assessment / Funding Request / Construction Schedule

Project Priority Ranking	Network Gap: Is a Network Gap being filled?	High Crash Location: Pedestrian	Bicycle	Vehicle	Environmental Justice: Is an Environmental Justice Population Served? (See MassGIS Map)	Safe Routes to School: Does this project improve safety or accessibility within one mile of a school?	Safe Routes for Seniors: Does this project improve safety or accessibility within 1/4 mile of a Senior destination?	Accessibility: Does this project improve conditions for people with disabilities?	State-owned ROW: Does this project include any state-owned right-of-way?	Estimated Project Cost Range	Funding Requested from MassDOT	Other Funding Source(s) & Amount (if applicable)	Anticipated Construction Duration
1	No	No	No	No	Yes	Yes	No	Yes	No	$100,000 - $250,000	$250,000.00	Chapter 90. Town Warrant	6
2	No	No	No	No	Yes	Yes	No	Yes	Yes	>$500,000	$500,000.00	Chapter 90, Town Warrant, SS4A ($300,000)	18
3	No	No	No	No	Yes	Yes	No	Yes	No	$250,000 - $500,000	$500,000.00	$0	6
4	No	No	No	No	Yes	Yes	No	Yes	Yes	$100,000 - $250,000	$200,000.00	$0	12
5	No	No	No	No	Yes	Yes	No	Yes	Yes	>$500,000	$500,000.00	$315,000	8
6	No	No	No	No	Yes	Yes	No	Yes	No	$100,000 - $250,000	$135,000.00	$0	3
7	No	No	No	No	Yes	Yes	No	Yes	No	>$500,000	$500,000.00	$230,000	8
8	No	No	No	No	Yes	Yes	No	No	No	$250,000 - $500,000	$255,000.00	$0	3
9	No	No	No	No	Yes	Yes	No	Yes	No	>$500,000	$245,000.00	$0	12
10	No	No	No	No	Yes	Yes	No	Yes	No	>$500,000	$500,000.00	$145,000	6

11	**Glover Street and High Street Corridor Sidewalk, Driveway, and Pedestrian Curb Ramp Improvements @ Highland St, High St, Dresser St**	Install new ADA compliant curb ramps at the intersection of Poplar and Highland, Glover and High, and Glover and Dresser; replace non-compliant walks and reset existing and install new granite curb along Glover St and High street between South St and Glover St; replace non-compliant walks along Glover between Dresser and High Street.	Safety/Pedestrian/Bicycle Audit	Intersection of Poplar Street and Highland Street, Glover Street between south Street and High Street, High Street between South Street and Glover Street	https://www.google.com/maps/place/42%C2%B004'31.4%22N+72%C2%B002'43.6%22W/@42.0753873,-72.048011,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0753833!4d-72.0454361?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	No	Yes	No	>$500,000	$500,000.00	$35,000	3
12	**Sidewalk Reconstruction and Pedestrian Curb Ramp Improvements around Southbridge Academy**	Replace existing non-compliant sidewalk, reset existing and install new granite curb along Dresser Street from Glover St to Chapin St. (2,700'); installation of new ADA compliant curb ramps along Dresser at Cole Ave, Marcy St, Goddard St, and Elm St.; install new pedestrian crossings and RRFB at Southbridge Rehabilitation Facility; reconstruct concrete sidewalk along Cole Ave between Woodycrest and Dresser, install new pedestrian crossing including curb extensions, new ADA compliant curb ramps and RRFB at Southbridge Academy; install ADA compliant curb ramps along Marcy Street at intersection with Dupaul St., Curtis St., Dresser St., Gardner St., and Forest St.; replace non-compliant walk and driveways with compliant adjacent to intersection of Marcy and Forest Ave; replace non-compliant walks along Gardner St.; install new pedestrian crosswalks and ADA compliant curb ramps at intersection of Dupaul St at Franklin St; install new pedestrian crosswalks and ADA compliant curb ramps at intersection of Goddard St and Dupaul; replace non-compliant walk in front of Southbridge Church of Christ; replace non-compliant walk along Goddard Street; replace non-compliant walks and driveways along Chapin Street.	Safety/Pedestrian/Bicycle Audit	Dresser Street from Glover to Elm, Cole Ave between Woodycrest and Dresser, Marcy between Forest Ave and Dupaul Street, Chapin Street between Main Street and Dresser Street, Franklin Street at Dupaul Street	https://www.google.com/maps/place/42%C2%B004'31.2%22N+72%C2%B002'25.4%22W/@42.0753484,-72.0429527,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0753444!4d-72.0403778?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	No	No	No	Yes	No	No	Yes	Yes	Yes	No	Yes	No	No	Yes	Yes	Yes	No	No	No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes	Yes	No	Yes	No	>$500,000	$500,000.00	Chapter 90, Town Warrant, SS4A ($425,000)	12
13	**Pedestrian Curb Ramp Improvements near Hartwell Street**	Install ADA compliant curb ramps along Hartwell Stret at the intersection of Marcy St, Park Ave and Spring St.	Safety/Pedestrian/Bicycle Audit	Intersections of Hartwell St and Marcy St, Hartwell St and Park Ave, Hartwell St and Spring St	https://www.google.com/maps/place/42%C2%B004'15.0%22N+72%C2%B002'24.6%22W/@42.0708484,-72.0427443,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0708444!4d-72.0401694?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	No	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	No	Yes	No	<$50,000	$40,000.00	$0	3
14	**Park Street Sidewalk Improvements**	Replace non-compliant walk and driveways, new ADA compliant curb ramps along Park Street at intersection of Elm St, and Everett St.	Safety/Pedestrian/Bicycle Audit	Park St and Elm St, and Park St and Everett St	https://www.google.com/maps/place/42%C2%B004'22.2%22N+72%C2%B002'03.1%22W/@42.0728318,-72.0367638,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0728278!4d-72.0341889?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	No	No	No	Yes	No	No	No	No	Yes	No	No	No	No	No	No	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	No	Yes	Yes	$100,000 - $250,000	$170,000.00	$0	3
15	**Pedestrian Curb Ramp Improvements – Elm Street @ Summer Street**	Installation of ADA compliant curb ramps along Summer Street at intersection with Elm St, and Everett St.	Safety/Pedestrian/Bicycle Audit	Summer St and Elm St, and Summer St and Everett St	https://www.google.com/maps/place/42%C2%B004'19.2%22N+72%C2%B002'07.9%22W/@42.0719901,-72.0380943,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0719861!4d-72.0355194?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	No	Yes	Yes	$50,000 - $100,000	$50,000.00	$0	3
16	**Intersection Improvements – Elm Street @ Eastford Road and Hartwell St**	Reconfigure geometry of the intersection of Elm St and Eastford Rd to reduce pedestrian crossing distance and vehicular approach speeds, construct a pedestrian refuge island for safer crossing, reset existing and install new granite curb, install ADA compliant curb ramps and pedestrian crosswalks; install new ADA compliant curb ramps at the intersection of Williams Street and Elm Street; install new pedestrian crossing between intersection of Williams St and Eastford St.	Safety/Pedestrian/Bicycle Audit	Elm Street @ Eastford Road and Hartwell St	https://www.google.com/maps/place/42%C2%B004'12.2%22N+72%C2%B002'10.9%22W/@42.0700596,-72.0389249,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0700556!4d-72.03635?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	Yes	No	Yes	Yes	No	No	No	Yes	Yes	No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	Yes	Yes	No	Yes	Yes	$100,000 - $250,000	$225,000.00	$0	6
17	**Intersection Improvements – Elm Street @ Everett Street and Marsh Ave**	Reconfigure geometry to reduce pedestrian crossing distance, install ADA compliant curb ramps, reset existing and install new granite curb and new pedestrian refuge island; replace non-compliant walk along Lapierre Ave; installation of new pedestrian crossing and ADA compliant curb ramps at Elm Street connecting to Lapierre Ave sidewalk; replace non-compliant walk and install new ADA compliant curb ramps along Marsh Ave to tie into intersection.	Safety/Pedestrian/Bicycle Audit	Elm Street @ Everett Street and Marsh Ave	https://www.google.com/maps/place/42%C2%B004'03.2%22N+72%C2%B002'10.6%22W/@42.0675707,-72.0388527,616m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0675667!4d-72.0362778?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	Yes	No	Yes	Yes	No	No	No	Yes	Yes	No	No	No	Yes	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	Yes	Yes	No	Yes	No	$100,000 - $250,000	$225,000.00	$0	6
18	**Elm Street Sidewalk Upgrades between Brook Road and Lebanon Street including Pedestrian Curb Ramp Improvements at Cedar Street and Brook Street**	Replace non-compliant walk and driveways along Elm Street between Brook Street ad Lebanon Street; installation of new ADA compliant curb ramps at intersection with Cedar Street and Brook Street.	Safety/Pedestrian/Bicycle Audit	Elm Street between Brook Road and Lebanon Street	https://www.google.com/maps/place/42%C2%B003'55.5%22N+72%C2%B002'12.5%22W/@42.0654096,-72.0393721,616m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0654056!4d-72.0367972?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	No	Yes	No	$250,000 - $500,000	$345,000.00	$0	3
19	**Intersection and Pedestrian Curb Ramp Improvements – Eastford Road @ Durfee Street**	Replace non-compliant walks and install new ADA compliant curb ramps at the intersection of Durfee Street and Eastford Road; install new RRFB at Eastford Road crossing.	Safety/Pedestrian/Bicycle Audit	Eastford Road @ Durfee Street	https://www.google.com/maps/place/42%C2%B003'49.4%22N+72%C2%B002'33.7%22W/@42.0637262,-72.0452555,616m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0637222!4d-72.0426806?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	Yes	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	No	Yes	Yes	$100,000 - $250,000	$110,000.00	$0	3
20	**Pedestrian Curb Ramp Improvements Adjacent to Pleasant Street**	Installation of ADA compliant curb ramps along Pleasant St at the intersections of Canal St, the side entrance to the Big Bunny Market Plaza, Wall St, and Belmont St.; replace non-compliant walks and install new ADA compliant curb ramps at the intersection of Wall St and Langois Ave.	Safety/Pedestrian/Bicycle Audit	Pleasant Street and Canal Street, Pleasant Street and Wall Street, Pleasant Street and Belmont Street,Wall Street and Langois Ave	https://www.google.com/maps/place/42%C2%B005'00.5%22N+72%C2%B002'43.0%22W/@42.0834679,-72.0478471,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0834639!4d-72.0452722?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	No	Yes	No	$100,000 - $250,000	$205,000.00	$0	3
21	**Main Street and West Street Intersection Improvements**	Reconfigure the intersection geometry to facilitate safer pedestrian access and car travel; Upgrade with ADA compliant pedestrian ramps, reset existing and new granite curb, drainage upgrades, new pedestrian crosswalks, replace traffic signals, signage.	Safety/Pedestrian/Bicycle Audit	Main Street @ West Street	https://www.google.com/maps/place/42%C2%B004'50.4%22N+72%C2%B002'40.9%22W/@42.0806596,-72.0472555,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.0806556!4d-72.0446806?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	Yes	Yes	Yes	Yes	Yes	No	No	Yes	Yes	No	No	Yes	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes	No	No	Yes	No	No	No	No	No	Yes	Yes	No	Yes	Yes	>$500,000	$500,000.00	Chaper 90, Town Warrant, SS4A ($2,330,000)	30
22	**MA-169 Crossing Improvements at the United Lens Company**	Construct ADA compliant pedestrian curb ramps along MA-169 between the Cornerstone Bank and the United Lens Company buildings, install new RRFB, repaint pedestrian crosswalk, curb extension.	Safety/Pedestrian/Bicycle Audit	Worcester Street near Laurel Street	https://www.google.com/maps/place/42%C2%B005'04.4%22N+72%C2%B001'34.5%22W/@42.084554,-72.0288305,615m/data=!3m2!1e3!4b1!4m4!3m3!8m2!3d42.08455!4d-72.0262556?authuser=0&entry=ttu&g_ep=EgoyMDI1MDQwNy4wIKXMDSoASAFQAw%3D%3D	Yes	No	No	Yes	No	Yes	Yes	No	No	No	Yes	Yes	Yes	Yes	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	Yes	No	Yes	Yes	$100,000 - $250,000	$185,000.00	$0	3
23																																																	
24																																																	

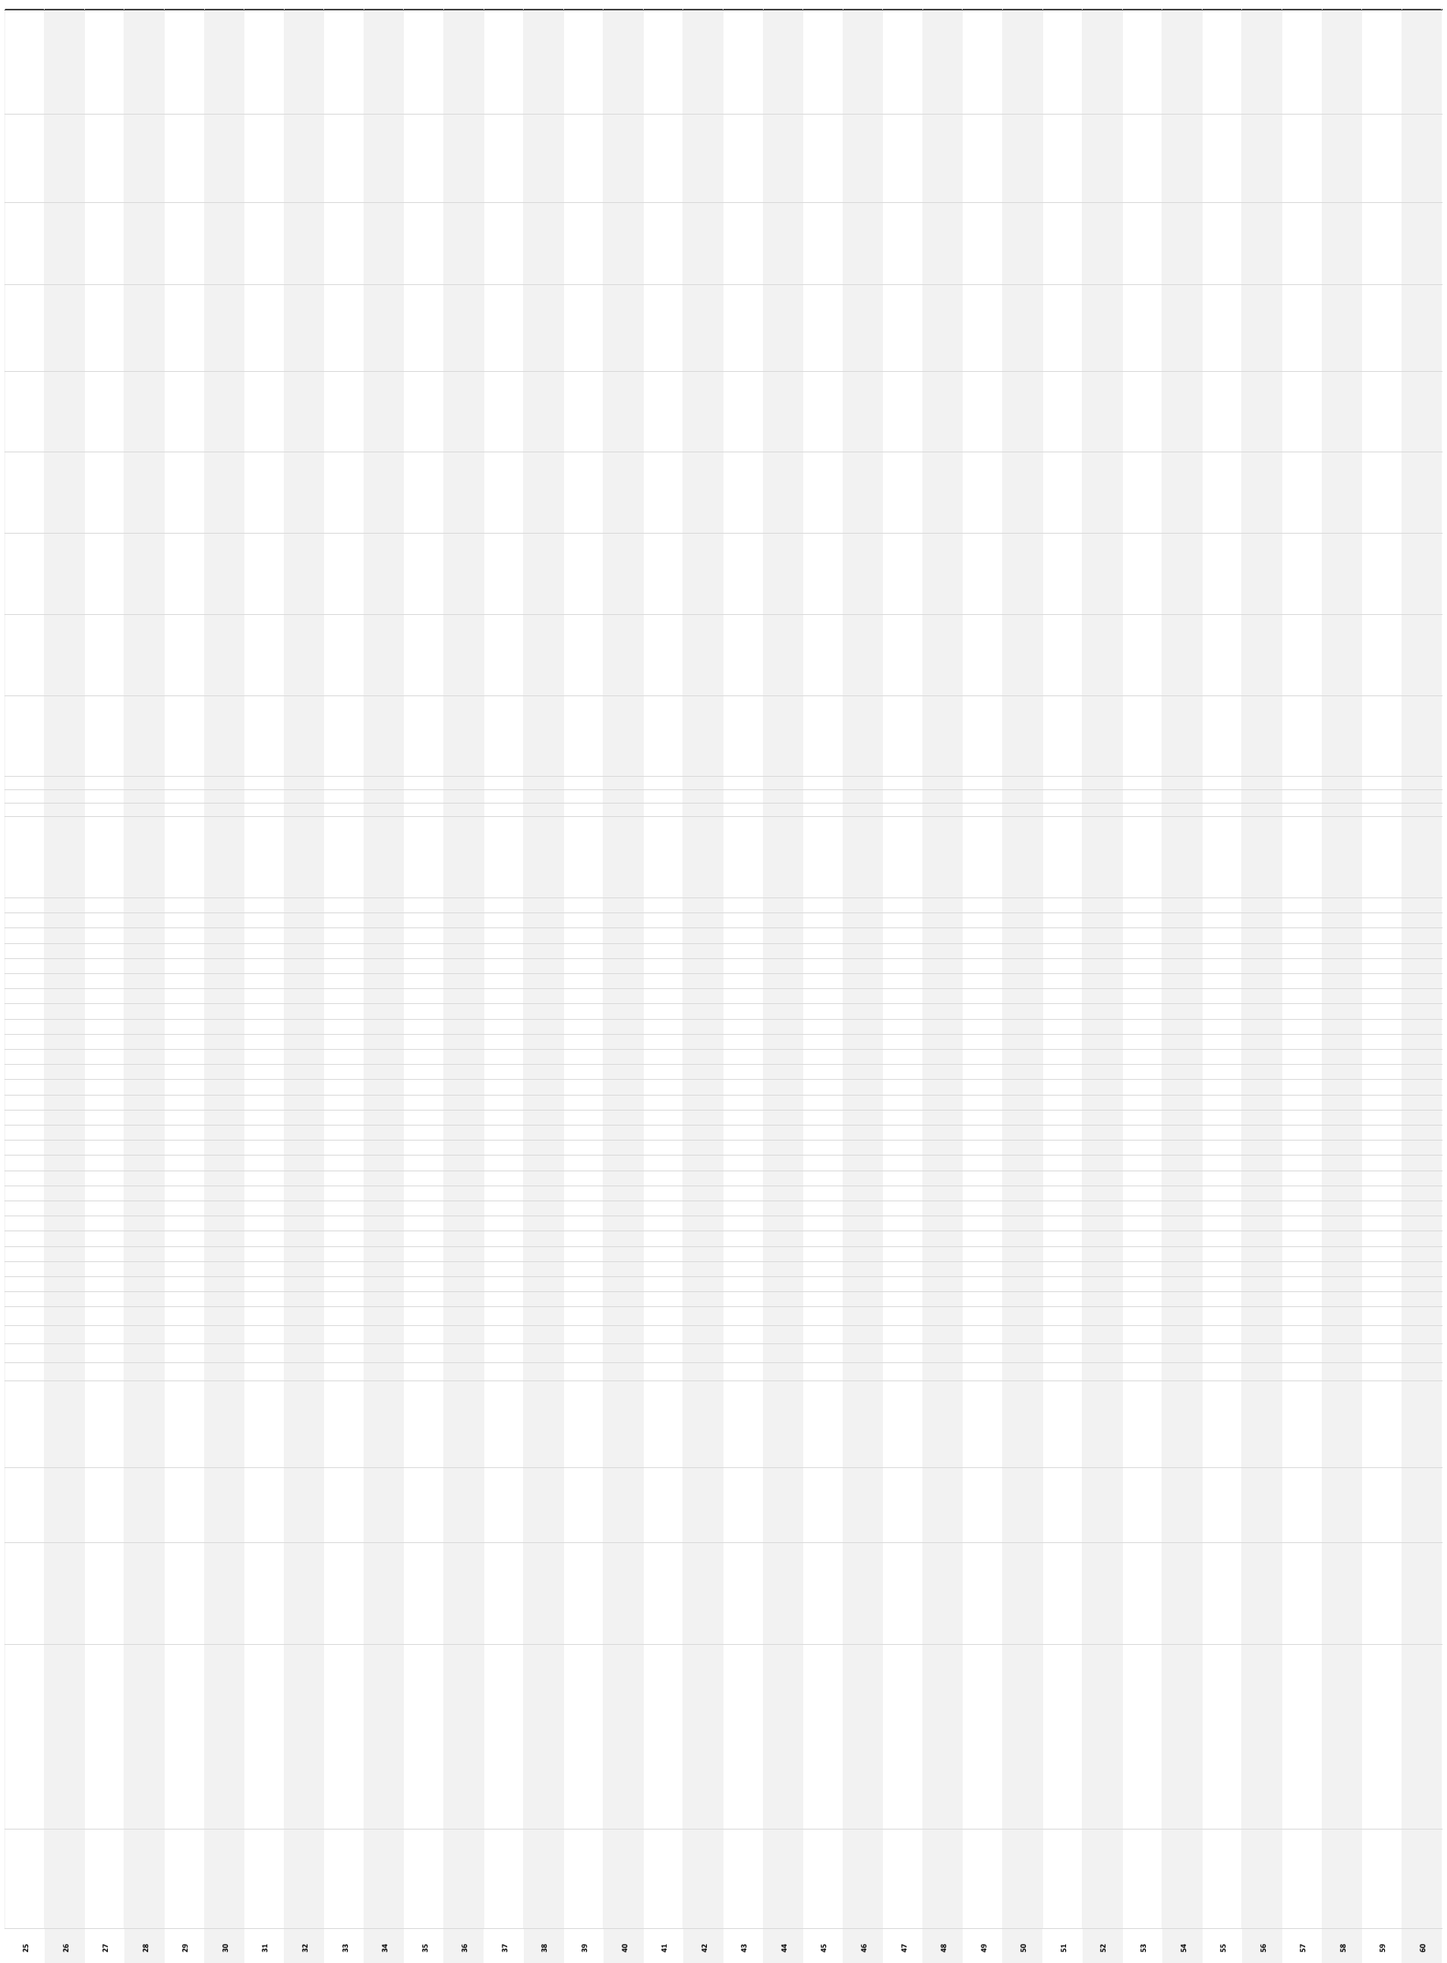
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96

97																																																									
98																																																									
99																																																									
100																																																									